

3/4 U CPCI Serial Case System

User's Manual



Product Number:
24579-634

R1.0	October 2015	Initial Release

Impressum:

Schroff GmbH

Langenalber Str. 96 - 100
75334 Straubenhardt, Germany

The details in this manual have been carefully compiled and checked.

The company cannot accept any liability for errors or misprints.

The company reserves the right to amendments of technical specifications due to further development and improvement of products.

Copyright © 2018


All rights and technical modifications reserved.


1	Safety	1
1.1	Safety Symbols used in this document.....	1
1.2	General Safety Precautions	1
1.3	References and Architecture Specifications.....	2
1.4	Product Definition	2
1.5	Case	3
1.6	System Overview.....	3
1.7	Backplane	5
1.8	Topology of a 9 Slot Backplane	6
1.9	Power Backplane.....	7
1.10	Power Supply.....	8
1.10.1	CPCI Plug-In AC Power Supply.....	9
1.10.2	Grounding/Earthing	9
2	Cooling	10
3	Installation	11
3.1	General Installation Guidelines	11
3.1.1	Unpacking	11
3.1.2	Ensuring Proper Airflow.....	11
3.2	Initial Operation	11
4	Service.....	12
4.1	Technical support and Return for Service Assistance	12
4.2	Declaration of Conformity.....	12
4.3	Scope of Delivery (24579-634)	13
4.4	Accessories	13
4.5	Spare Parts	13
5	Technical Data	14
6	Dimensions.....	15


1 Safety

The intended audience of this User's Manual is system integrators and hardware/software engineers.


1.1 Safety Symbols used in this document

	<p>Hazardous voltage!</p> <p><i>This is the electrical hazard symbol. It indicates that there are dangerous voltages inside the Shelf.</i></p>
---	---

	<p>Caution!</p> <p><i>This is the user caution symbol. It indicates a condition where damage of the equipment or injury of the service personnel could occur. To reduce the risk of damage or injury, follow all steps or procedures as instructed.</i></p>
---	--

	<p>Danger of electrostatic discharge!</p> <p><i>Static electricity can damage sensitive components in a system. To avoid damage, wear ESD wrist straps or at regular intervals touch blank enclosure parts.</i></p>
---	--

1.2 General Safety Precautions

	<p>Warning!</p> <p><i>Voltages over 60 VDC can be present in this equipment. This equipment is intended to be accessed, to be installed and maintained by qualified and trained service personnel only.</i></p> <p><i>This equipment is designed in accordance with protection class 1!</i></p> <p><i>It must therefore be operated only with protective GND/earth connection!.</i></p>
---	--

- Service personnel must know the necessary electrical safety, wiring and connection practices for installing this equipment.
- Install this equipment only in compliance with local and national electrical codes.

1.3 References and Architecture Specifications

- User Guide Schroff CPCI Serial Backplanes
Order no.: 63972-333
- User Manual Power Backplanes
Order no.: 63972-334
- User Manual 19" Power Supply 11098-538
Order no.: 63972-335

1.4 Product Definition

The Schroff CPCI Serial system consist of:

- A shielded ratiopacPRO-air case with front card cage for 3 U boards according to CompactPCI Standard CPCI Serial (CPCI-S.0)
- 9 slot 3 U CPCI Serial backplane without Rear I/O
- Power Backplane with SSI-type connector
- 1 CPCIS plug-in power supply (300 W) with wide range input and SSI-type connector
- Power input module with IEC 320-C14 connector, mains/line switch, mains/line filter and fuses
- 2 Fans for the active cooling of the boards and the power supply



The system 24579-634 is described as an example below in this manual.

The system can be modified with various backplane configurations.

All pictures in this manual may differ from the latest series.

1.5 Case

The 4 U case is based on the Schroff ratiopacPRO-air system with EMC shielding. The card cage enables the assembly of 9 CPCI-S front boards.

The lower guide rails of the card cage are equipped with ESD clips.

1.6 System Overview

Figure 1: Front View



- 1 PSU
- 2 Card cage


- 3 Air Intake

Figure 2: Rear View



1.7 Backplane

Figure 3: Example: 9 Slot Backplane, Systemslot right

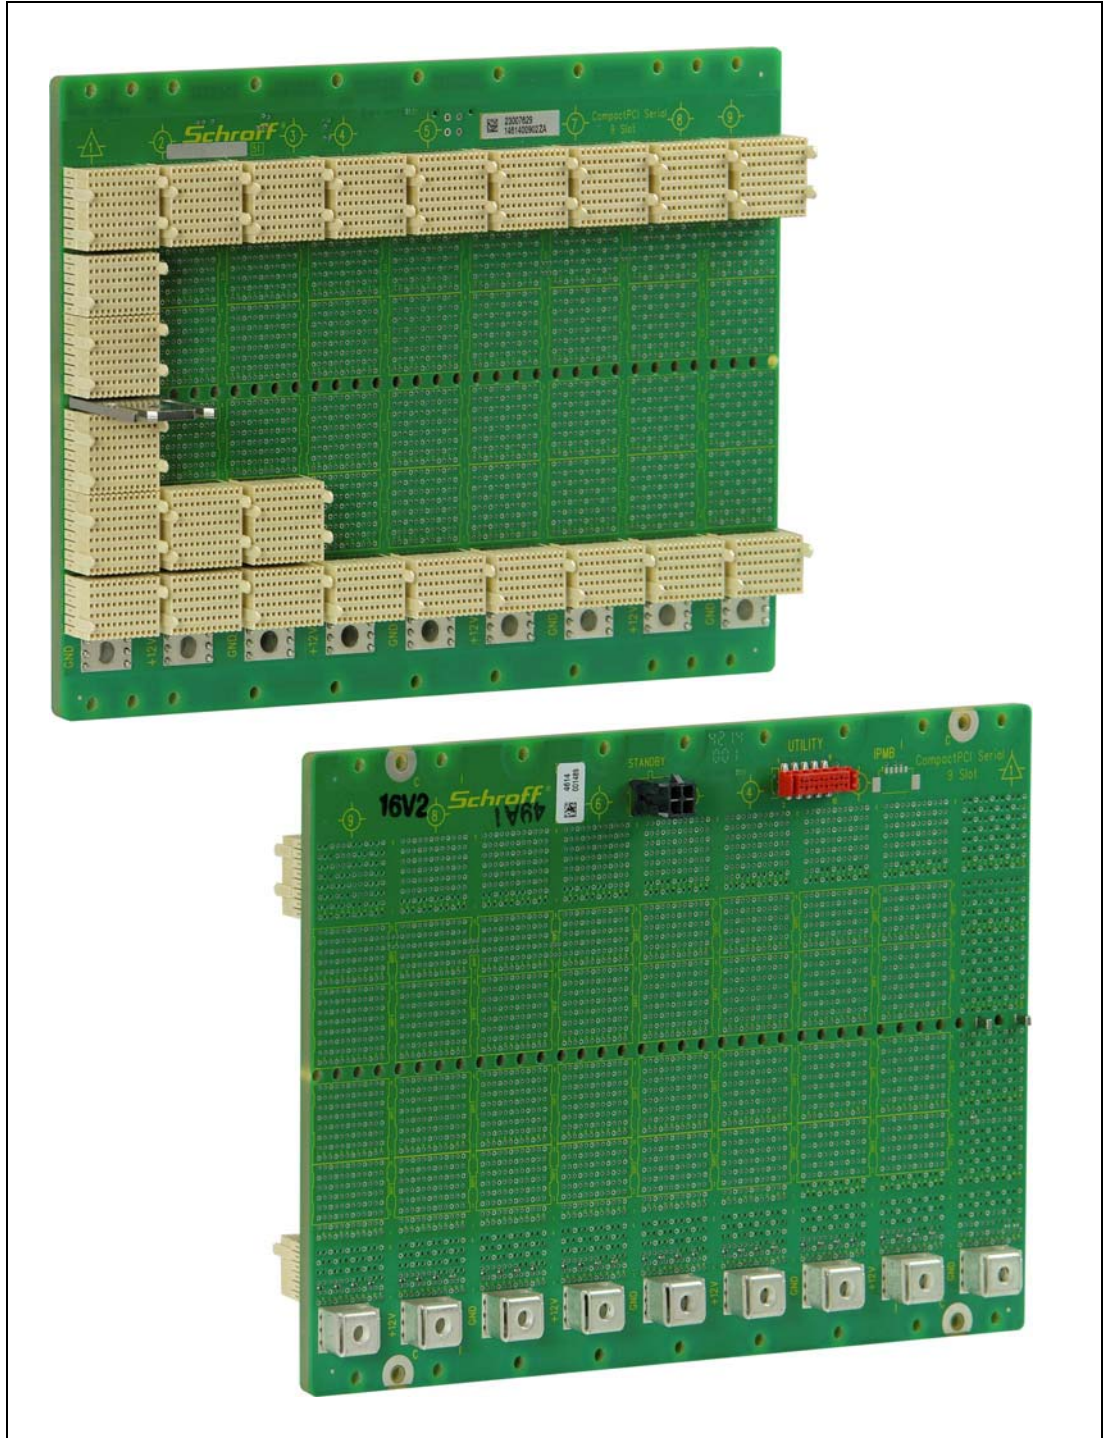

1.8 Topology of the 9 Slot Backplane


The CPCI Serial backplane with 9 slots supports the full set of serial links at all slots.

The serial links (SATA/SAS, USB2/3, PCIe) are arranged as a Single Star architecture.

Ethernet is implemented by 4 differential pairs in Single Star routing to support 10/100/1000/10GBase-T.

More information in the Schroff Backplane manual, order no.: 63972-333


Figure 4: Backplane Topology

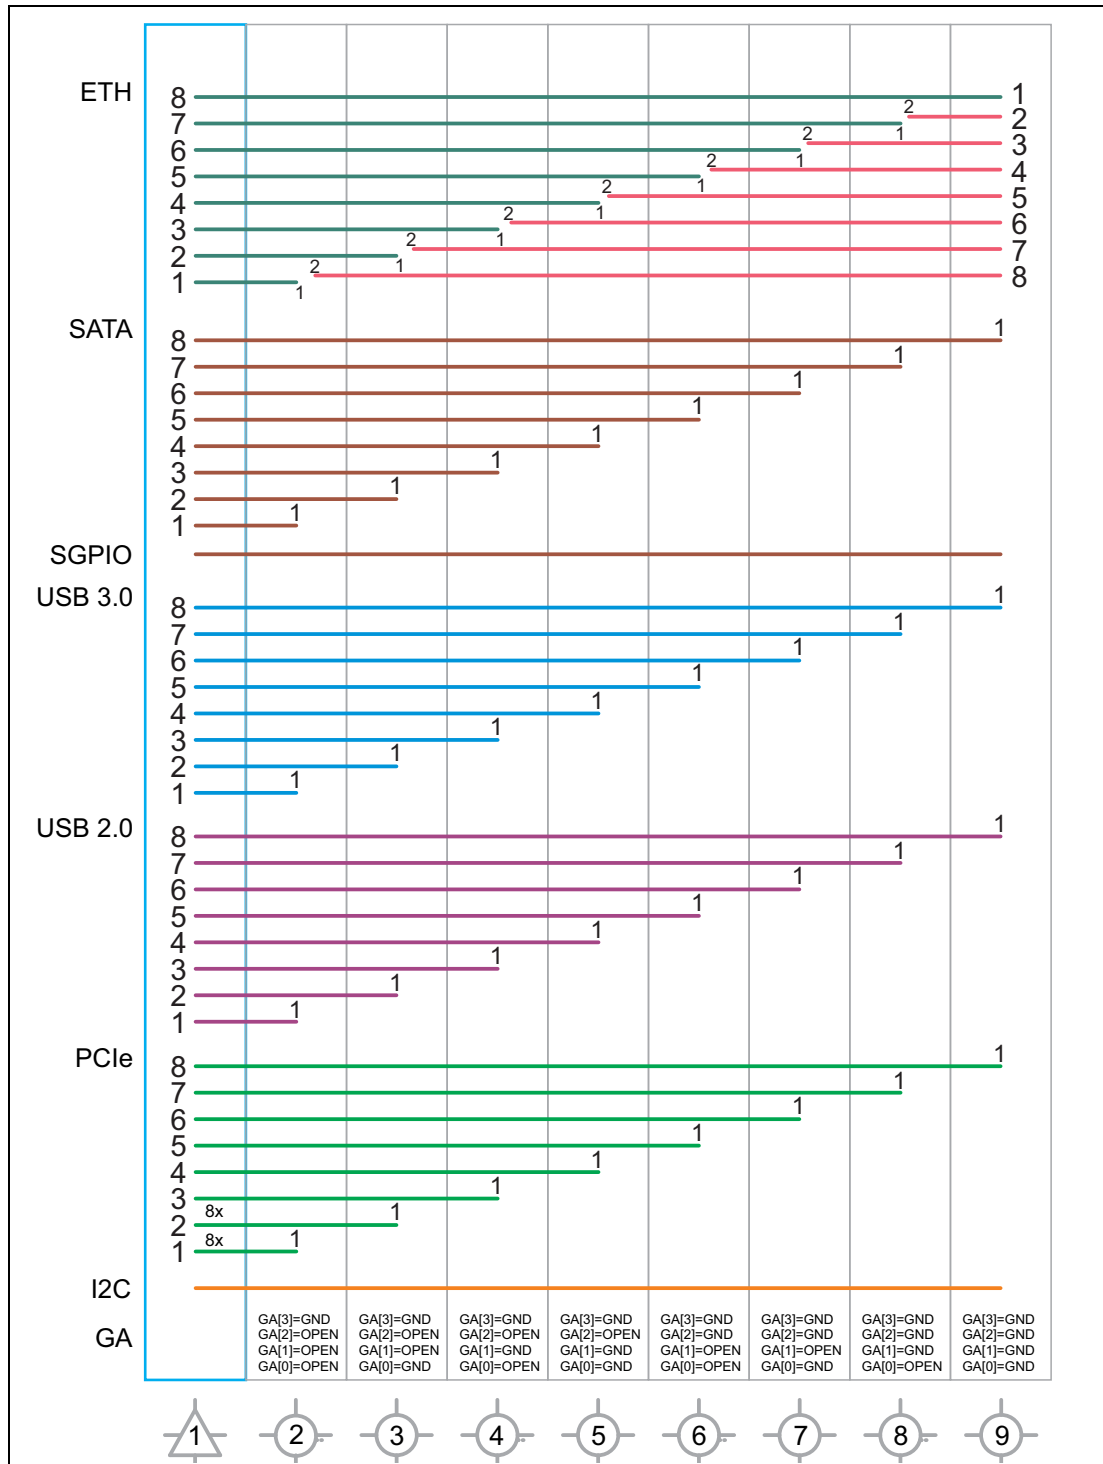

1.9 Power Backplane

The Schroff CompactPCI Serial power backplane accepts a pluggable power supply with SSI-type connector. The power backplane provides +12V payload power and for wake-up events an additional +5V Standby voltage. More information in the backplane's user manual order no.: 63972-334

Figure 5: Power Backplane

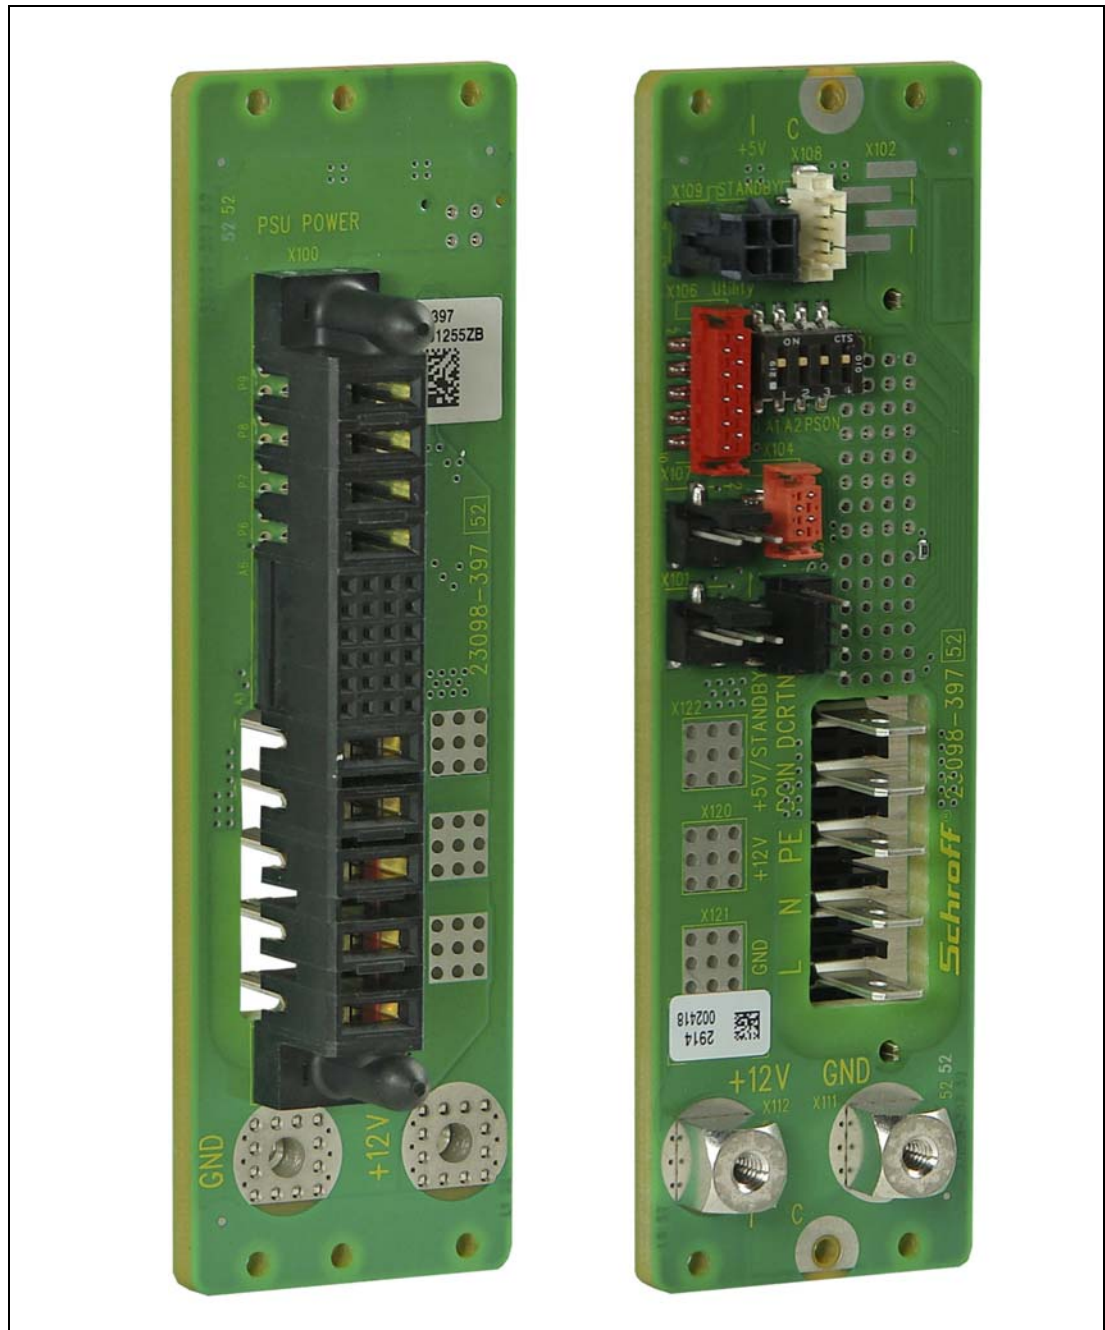

1.10 Power Supply



Hazardous voltage!

Parts of the power supply may be exposed with hazardous voltage. Always remove mains/line connector before carry out any assembly work.



Caution!

Your system has not been provided with a AC power cable. Purchase an AC power cable that is approved for use in your country. The AC power cable must be rated for the product and for the voltage and current marked on the product's electrical ratings label. The voltage and current rating of the cable should be greater than the ratings marked on the product.


The CPCI Serial system is powered by a 300 W CPCI Serial plug-in power supply with wide range input (100 - 240 VAC). It provides 12 V payload power and 5 V standby power for CPCI Serial boards.

The power supply is plugged-in in a dedicated slot at the left front side. The power supply contacts via a SSI-type connector to a Power backplane.

The power input is provided by an AC mains/line module with IEC 320-C14 connector, integrated mains/line fuses and line filter.

The fuse rating is 4 A slow blow (T4AH250V).

Figure 6: AC mains/line module

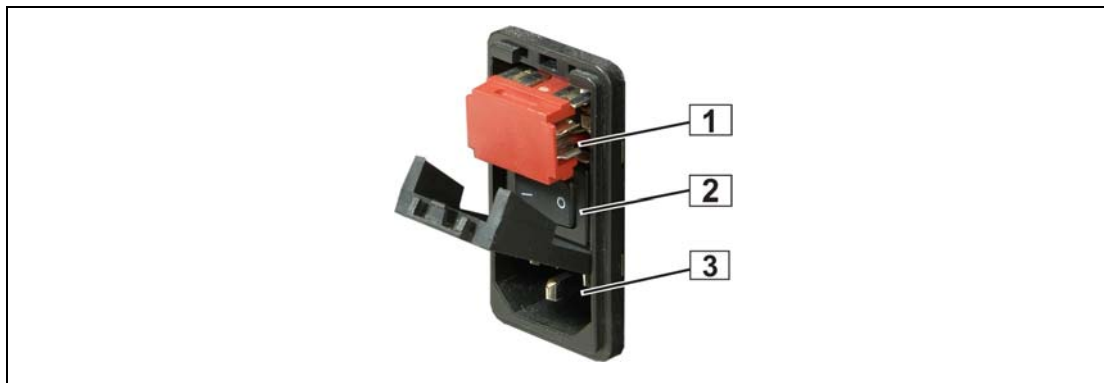

12309010

- 1 Fuse holder
- 2 Mains/line switch

- 3 AC Connector (IEC320-C14)

1.10.1 CPCI Plug-In AC Power Supply

Figure 7: Power Supply




Table 1: Data AC Power Supply

Input voltage nominal	100 - 240 VAC
Mains Frequency	50 / 60 Hz
Output (max.)	300 W
Output voltages	5.0 V - 2.5 A 12.0 V - 25 A
Ripple	< 1 % Peak/Peak
Cooling	Requires Airflow > 10 CFM for 300 W Output

More information in the user manual order no.: 63972-335

1.10.2 Grounding/Earthing

	<p>Caution!</p> <p>The unit is designed in accordance with protection class 1! It must therefore be operated with protective earth/GND connection. Use only a three conductor AC power cable with a protective earth conductor that meets the IEC safety standards!</p>
---	--


2 Cooling

The CPCI Serial boards and the power supply are cooled by forced air convection through two 12 VDC radial fans (36 m³/h (21 cfm)).

**Caution!**

To maintain proper airflow, all open slots must be covered with filler panels. The filler panel should include an airflow baffle that extends to backplane.

Figure 8: Fans and Air Flow

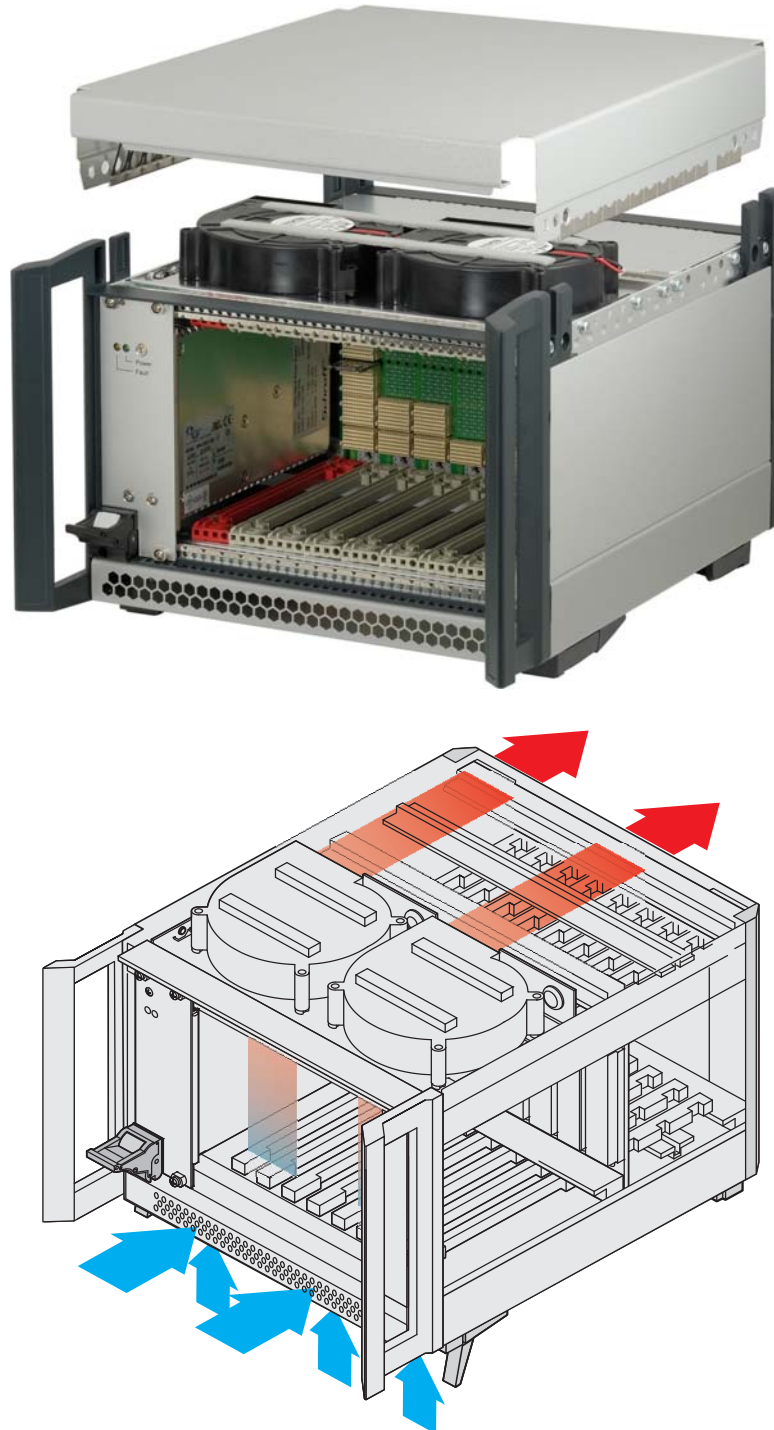

3 Installation

3.1 General Installation Guidelines

3.1.1 Unpacking


Caution!

When opening the shipping carton, use caution to avoid damaging the system.

Consider the following when unpacking and storing the system:

- Leave the system packed until it is needed for immediate installation.
- After unpacking the system, save and store the packaging material in case the system must be returned.

If the packaging is damaged and possible system damage is present, report to the shipper and analyze the damage.

3.1.2 Ensuring Proper Airflow

- Maintain ambient airflow to ensure normal operation. If the airflow is blocked or restricted, or if the intake air is too warm, an over temperature condition can occur.
- Ensure that cables from other equipment do not obstruct the airflow through the systems.
- Use filler panels to cover all empty chassis slots. The filler panel should include an airflow baffle that extends to backplane. The filler panel prevents fan air from escaping out of the front of an open slot.

3.2 Initial Operation


Warning!

This equipment is intended to be accessed, to be installed and maintained by qualified and trained service personnel only.

This equipment is designed in accordance with protection class 1!

It must therefore be operated only with protective GND/earth connection!

- Ensure that the system has not been damaged during transport, storage or assembly.
- Check the Protective Earth (PE) resistance, should be < 0,1 Ohm.
- Plug-in the boards.
- Cover all open Slots with filler panels.
- Switch on the system.

4 Service

4.1 Technical support and Return for Service Assistance

We generally recommend to return the complete system. For all product returns and support issues, please contact your Schroff sales distributor.

We recommend that you save the packing material. Shipping without the original packing material might void the warranty.

4.2 Declaration of Conformity

SCHROFF CompactPCI systems are developed and manufactured according to EN 60950-1.

SCHROFF CompactPCI systems are not end-products with independent functionality as described in the definition of the EMC regulations, and therefore a CE marking is not required. However, when CPCI cards are assembled according to specification, the systems fulfill the requirements in accordance with EMC Directive 2004/108/EG and Low-voltage Directive 2006/95/EG.

Interference resistance and interference emissions are factors which are heavily influenced by the type and quantity of CPCI cards used in the system assembly. Through the use of high quality line filters and EMC optimized enclosure design, SCHROFF offers CPCI systems which serve as an ideal base for system integrators, which comply with the prescribed limits of EN 6100-6-3 and EN 61000-6-2

The systems are generally equipped with power supplies which possess CE markings in accordance with EN 60950-1, EN 61000-6-3, EN 61000-6-2).

Before delivery a high-voltage, protective earth and functionality test is carried out on each individual system.

4.3 Scope of Delivery (24579-634)

Quantity	Description
1	ratioPacPRO-air case 4 U / 44 HP, shielded, powder coated (RAL9006/RAL7016)
1	CPCIS backplane 9 slot 3 U
2	Power backplanes with SSI-type connector
1	Front card cage for max. 9 boards 3 U 160 mm deep IEEE guide rails inc. ESD clips)
1	300 W CPCIS plug-in power supply with input range of 100 VAC to 240 VAC
1	Power input module with IEC 320-C14 connector, mains/line switch, mains/line filter and fuses
1	Complete AC/DC cabling
2	Radial fans 36 m ³ /h (21 CFM) each
1	Rear panel 3 U, 36 HP

Please order the power cable separately.

4.4 Accessories

Order No.	Description
20848-7xx	Slot covers with front panel and EMC shielding for vacant slots. For dimensions, please see catalogue.
34562-8xx	Slot covers for vacant slots. For dimensions, please see catalogue.
24579-03x	Printed Circuit Board covers (solder side covers). For dimensions, please see catalogue

4.5 Spare Parts

On request.


5 Technical Data

Table 2: Technical Data

Dimensions	
Height (w/o feet)	177 mm (4 U)
Height (with feet)	192 mm (4 U)
Width (with handles)	44 HP (258,9 mm)
Depth (Card cage)	275 mm
Depth (Overall with handles)	340.5 mm
Weight	
Completely assembled	approx. 5 kg
Power Supply	
Input Voltage	100 VAC bis 240 VAC
Frequency	50 / 60 Hz
Power input	up to 300 W
Ambient Temperature	
Operation	+0 °C to +50 °C
Storage	-40 °C to +85 °C
Humidity	
Admissible humidity	30 % to 80 %, non-condensing
EMC, fulfils requirements for:	
Transient Emissions	EN 61000-6-3
Interference Resistance	EN 61000-6-2
Safety	
Test voltages according to EN 60950	Input - Output: 4,3 kVDC Input - PE: 2,2 kVDC Output - PE: 0,7 kVDC Output - Output: 0,7 kVDC
Shock and vibration:	EN 60068-2-6 and EN 60068-2-27
Electromagnetic Shielding	
Shielding attenuation	typ. 40 dB at 1 GHz if shielded front panels are used.

6 Dimensions

Figure 9: Dimensions

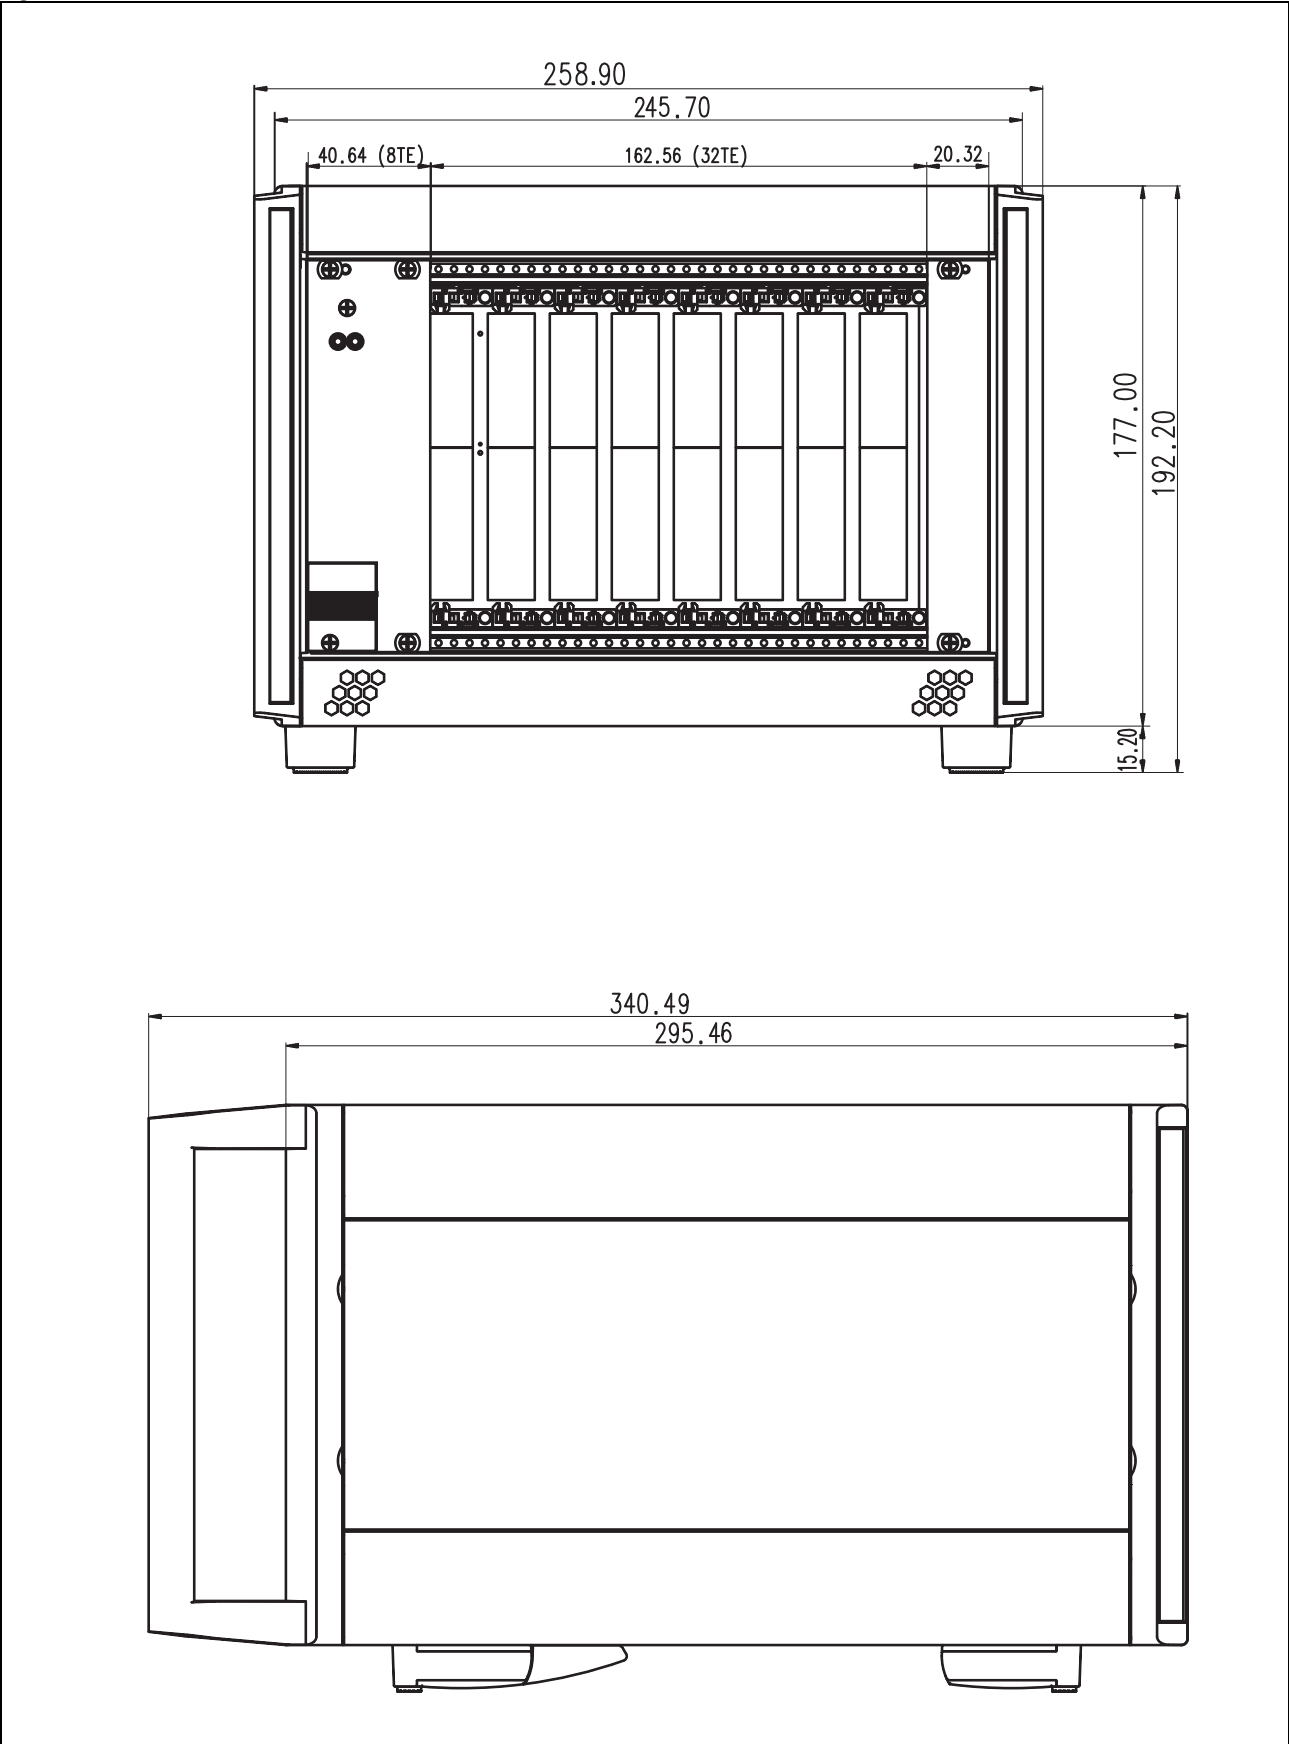

Schroff GmbH

Langenalber Str. 96 - 100
75334 Straubenhardt, Germany
Tel +49.7082.794.0
Fax +49.7082.794.200
schroff.nVent.com